

Warewashing Small Double Skin Glasswasher with Drain Pump and Detergent Dispenser - 1 cycle

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



Warewashing

Small Double Skin Glasswasher with Drain Pump and Detergent Dispenser - 1 cycle

402119 (ZGWSIG)

Glasswasher (small), double
skin, 1 cycle, drain pump,
detergent dispenser, 30
baskets/h

Short Form Specification

Item No.

304 AISI stainless steel front panel, wash tank and wash and rinse arms. Double skinned cabinet and door. Upper and lower rotary washing arms and rinsing arms. Separate washing and rinsing circuits. Built-in 5 litre boiler, washing temperature 55/65°C and hot rinse temperature 80/90°C. 1 washing cycle: 120 seconds. Rinse aid dispenser. Detergent dispenser. Drain pump. Hourly capacity: 30 baskets

Supplied with: n. 1 basket for glasses.

Main Features

- Easy service access to main components without moving the unit.
- Built-in pressure boiler sized to raise incoming water to guarantee a minimum rinsing temperature of 82 °C for sanitizing rinse. No external booster is required.
- Washing system endowed with rotating washing arms from both top and bottom, high powered wash pump and large capacity wash tank guarantee professional washing.
- Maximum capacity of 30 racks per hour.
- 120 seconds cycle.
- Simple operation control panel.
- Solid double skinned counter-balance door with hurt-free handle fully in stainless steel.
- Deep drawn pressed wash tank with fully rounded corners, sloped towards the drain to prevent dirt build up provides fast drainage in only a few minutes. Pressed wash tank with no welded points offer a guaranteed water tight solution.
- Equipped with single phase electrical cable and Schuko plug for easy and fast installation.

Construction

- Unit to feature rinse aid dispenser pump.
- Finished in top quality stainless steel with double skinned construction to aid durability and reduce noise.
- Equipped with drain pump for easy and quick installation without opening the machine.
- Detergent dispenser for easy connection to the external detergent source.
- Requires only 1 phase 230V supply.
- Internal components (arms and filter) are easy extractable.
- Completely closed on the back by a cover plate.


APPROVAL: _____

Included Accessories

- 1 of Square basket for glasses, 400x400x150mm PNC 867038

Optional Accessories

- Stainless steel tank filter for glasswashers PNC 864003
- Filter for partial demineralization PNC 864017
- Kit to measure total/partial water hardness PNC 864050
- Rinse booster pump kit for single tank pressure dishwasher PNC 864051
- Yellow cutlery container PNC 864242
- Filter for total demineralization PNC 864367
- Pressure reducer for single tank dishwasher PNC 864461
- Set of 4 yellow cutlery containers PNC 865574
- Cover grid for small/light items in rack PNC 867016
- Basket for glasses (395x395x115) PNC 867033
- Basket for 16 plates diam.190 mm, 8 plates diam. 240 mm PNC 867052
- Basket for glasses, h. 100 mm PNC 867053
- Basket for glasses, h. 200 mm PNC 867054
- Basket for glasses and saucers/cutlery inserts PNC 867055
- Basket for 16 glasses, h. 200 mm with angled base PNC 867056
- Round basket kit with square frame PNC 867057
- Insert for "flute" glasses PNC 867058
- Insert for 14 saucers for CEB 100/200 PNC 867060
- Inclined insert for cups PNC 867061
- Insert for 7 plates diam. 240 mm PNC 867062
- Square basket with angles for glasses 400x400x150 PNC 867067

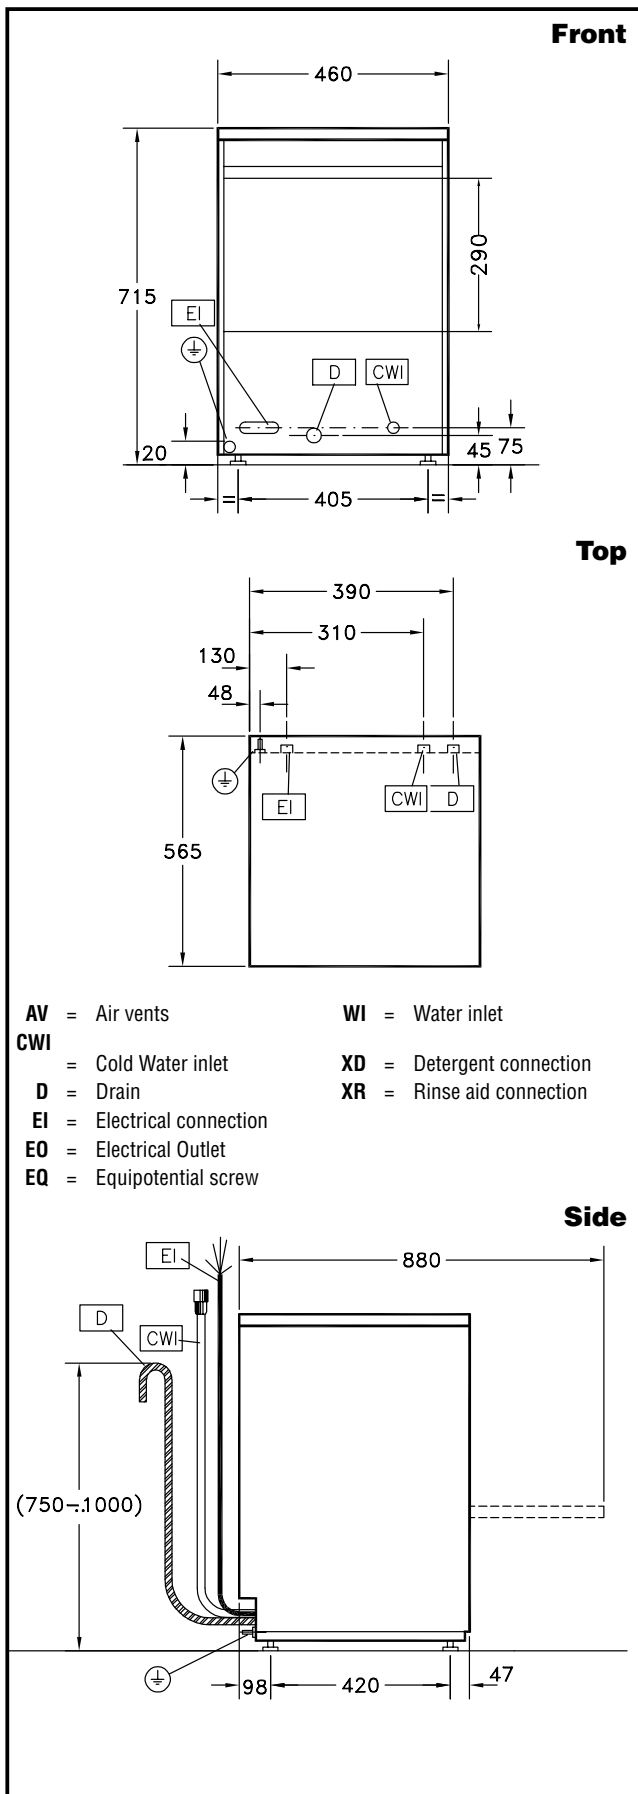

Electric

Supply voltage:	
402119 (ZGWSIG)	230 V/1N ph/50 Hz
Total Watts:	2.3 kW
Boiler heating elements:	2 kW
Tank heating elements:	0.8 kW
Wash pump size:	0.3 kW

Water:

Pressure, bar min/max:	1.8-3 bar
Water supply temperature:	10 °C
Boiler Capacity (lt):	5
Drain line size:	27mm
Incoming water line size:	G 3/4"
Washing cycle temperature:	55-65 °C
Washing tank capacity (lt):	6
Hot rinse cycle temperature:	80-90 °C
Hot rinse cycle water consumption (lt):	2.3

Key Information:

N° of working cycles - sec.:	1 (120)
Baskets per hour:	30
External dimensions, Height:	715 mm
External dimensions, Width:	460 mm
External dimensions, Depth:	565 mm
Net weight:	37 kg
Shipping weight:	42 kg
Shipping height:	900 mm
Shipping width:	620 mm
Shipping depth:	500 mm
Shipping volume:	0.28 m ³
Noise level:	<61 dBA
Cell dimensions - width:	400 mm
Cell dimensions - depth:	400 mm
Cell dimensions - height:	290 mm