

Smart Steam Crosswise Ovens Electric Convection Oven, 6 GN1/1 smart steam

ITEM # _____
 MODEL # _____
 NAME # _____
 SIS # _____
 AIA # _____



260687 (EFCE6ISSDS)

Smart Steam Convection
Oven Crosswise 6 GN 1/1,
electric

Short Form Specification

Item No. _____

Convection oven with direct steam. Main structure in stainless steel. Cooking chamber in 304 AISI stainless steel and side lighting. Double glass door with double-step opening and drip trays under the cooking chamber and under the door. Heating via "Incoloy" armoured elements positioned on the convector unit. Electromechanical thermostat; temperature adjustable from 30°C to 300°C; visual display and thermometer. Single sensor probe. Timer from 0 to 120 minutes with acoustic alarm. 5-level humidity control.

Supplied with n. 1 "cross-wise" tray rack composed by 2 side hangers, 60 mm pitch, for 6x1/1GN grids.

Main Features

- Main switch/Cooking mode selector which can be used to set: ON/OFF, hot air without humidification and hot air with humidification (choice of 5 different humidity levels).
- Rapid cooling of oven cavity.
- Timer to set the cooking time, adjustable up to 120 minutes or for continuous operation with an acoustic alarm to show the cycle has finished. At the end of the set cooking time the heat and the fan are automatically switched off.
- Maximum temperature of 300°C.
- Perfect evenness: guarantees perfect distribution of heat throughout the oven cavity.
- Halogen lighting and "crosswise" pan supports allow clear and unobstructed view of the products being cooked.
- Core temperature probe.
- Drip tray to collect residual cooking juices and fat.
- Drip tray under the door to collect condensed liquid.
- Double step opening to avoid accidental heat release.
- Manual valve to adjust the position of steam evacuation flap.
- Capacity: 6 GN 1/1 trays.

Construction

- Robust structure thanks to stainless steel construction.
- Cooking chamber in 304 AISI stainless steel.
- Double thermo-glazed door with open frame construction, for cool outside door panel. Swing hinged easy-release inner glass on door for easy cleaning.
- Ergonomic door handle.
- Integrated drain outlet.
- 1 pair of 60 mm pitch runners is supplied as standard.
- IPx4 water protection.

APPROVAL: _____

Optional Accessories


• 12lt external manual water softener	PNC 860412	☐
• Pair of 1/1GN AISI 304 stainless steel grids	PNC 921101	☐
• Support for 1/2GN pan (2pcs)	PNC 921106	☐
• Water softener with salt for ovens with automatic regeneration of resin	PNC 921305	☐
• Guide kit for 1/1GN drain pan	PNC 921713	☐
• Pair of AISI 304 stainless steel grids, GN 1/1	PNC 922017	☐
• Pair of grids for whole chicken (8 per grid - 1,2kg each), GN 1/1	PNC 922036	☐
• AISI 304 stainless steel grid, GN 1/1	PNC 922062	☐
• Open base for 6 GN 1/1 convection oven	PNC 922101	☐
• Shelf guides for 6x1/1GN, ovens base	PNC 922105	☐
• Retractable hose reel spray unit	PNC 922170	☐
• External side spray unit (needs to be mounted outside and includes support to be mounted on the oven)	PNC 922171	☐
• Fat filter for 6x1/1GN	PNC 922177	☐
• Pair of frying baskets	PNC 922239	☐
• Grid for whole chicken (8 per grid - 1,2kg each), GN 1/1	PNC 922266	☐
• Kit universal skewer rack and 6 short skewers for Lengthwise and Crosswise ovens	PNC 922325	☐
• Universal skewer rack	PNC 922326	☐
• 6 short skewers	PNC 922328	☐
• Volcano Smoker for lengthwise and crosswise oven	PNC 922338	☐
• Drip tray for convection oven 6 GN	PNC 922430	☐
• Mesh grilling grid, GN 1/1	PNC 922713	☐
• Non-stick universal pan, GN 1/1, H=20mm	PNC 925000	☐
• Non-stick universal pan, GN 1/1, H=40mm	PNC 925001	☐
• Non-stick universal pan, GN 1/1, H=60mm	PNC 925002	☐
• Double-face griddle, one side ribbed and one side smooth, GN 1/1	PNC 925003	☐
• Aluminum grill, GN 1/1	PNC 925004	☐
• Frying pan for 8 eggs, pancakes, hamburgers, GN 1/1	PNC 925005	☐




Electrolux
PROFESSIONAL

Smart Steam Crosswise Ovens Electric Convection Oven, 6 GN1/1 smart steam

Front

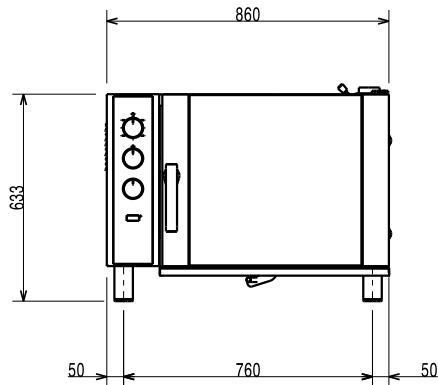


Side

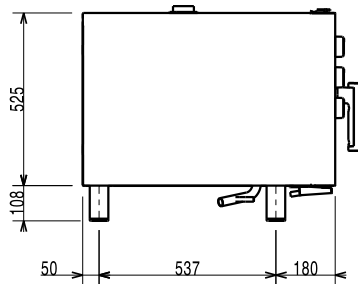

CWI1 = Cold Water inlet 1 (cleaning)
CWI2 = Cold Water Inlet 2 (steam generator)
D = Drain
EI = Electrical inlet (power)

Top

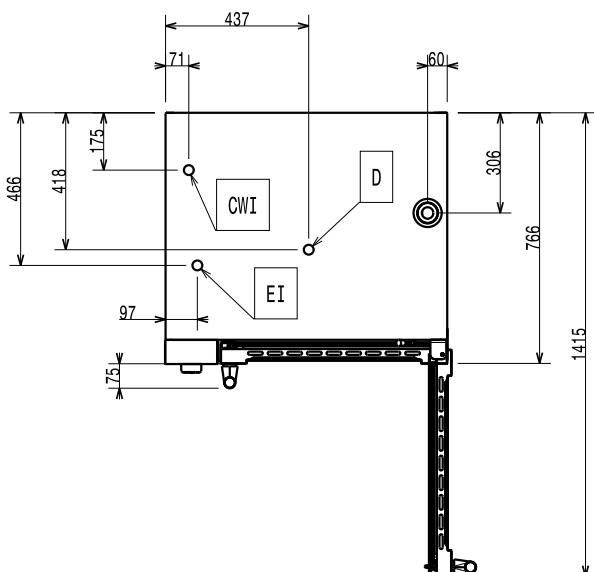

Electric

Supply voltage:

260687 (EFCE61SSDS) 380-400 V/3N ph/50 Hz

Electrical power max.:

7.7 kW

Total Watts:

7.7 kW

Capacity:

Trays type:

6 - 1/1 Gastronorm

Key Information:

External dimensions, Width: 860 mm

External dimensions, Depth: 767 mm

External dimensions, Height: 633 mm

Net weight: 79.5 kg

Runners pitch: 60 mm

Convection: X

Meat probe: X

Internal dimensions, Width: 560 mm

Internal dimensions, Depth: 370 mm

Internal dimensions, Height: 380 mm



Smart Steam Crosswise Ovens
Electric Convection Oven, 6 GN1/1 smart steam

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2024.02.09